





下悬窗XXC



可供选择把手:

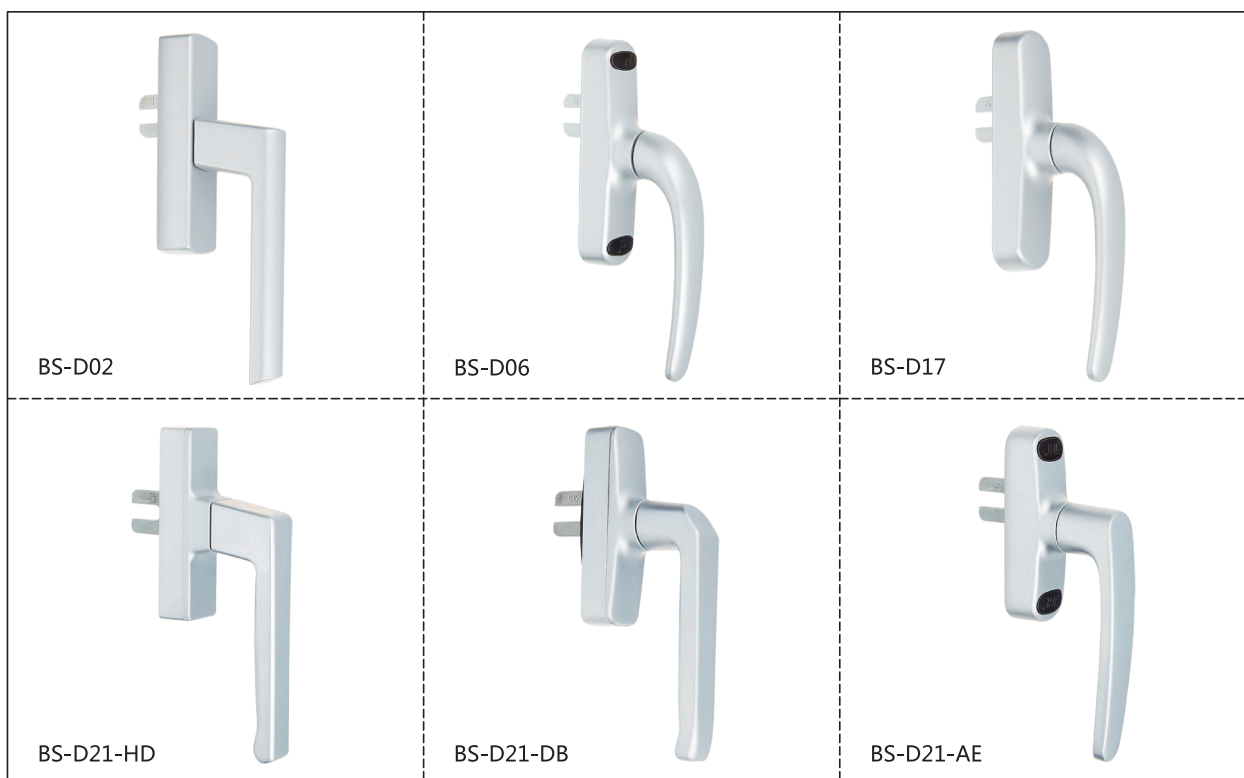




下悬窗XXC-01






该系统适用于标准欧式槽把手，锁点多款供选择
窗户的框与扇的组角必须牢固可靠
图中所示配置仅供参考
具体可根据型材及窗规格来搭配
舌头有多款，长度可选择

The system is applicable for standard European profile slot.
Optional handle & locking points;
Window frame and sash should be firm at the corner;
Attached Configuration only for reference.

序号 NO.	类型 ITEMS	编号 PART ID	数量 QTY	备注 REMARK
1	传动杆 drive link	CDG-A02	1	
2	T形钉 T nail	T-Z-XHX	1	
3	锁扣 Locking Kit	SK-B02	2	多款供选择 Multiple options
4	把手 Handle	BS-D21-AA	1	可选 Optional
5	伸缩撑 Expansion Stay	SCC-X"	2	多款供选择 Multiple options
6	滑撑 Friction Stay	22 槽下悬滑撑 22 underslot suspension brace	2	多款供选择 Multiple options

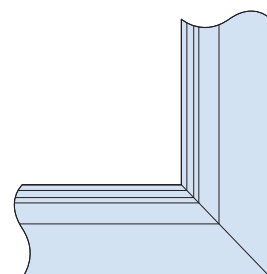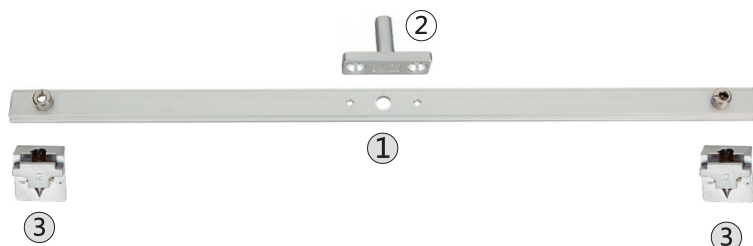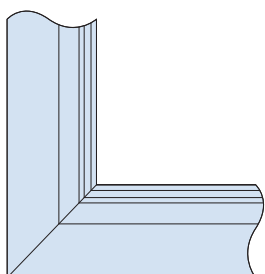




下悬窗XXC-02

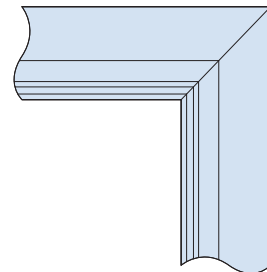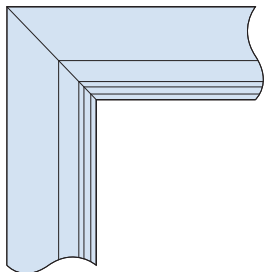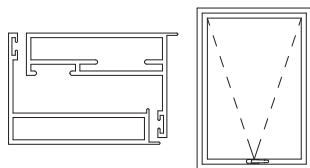










该系列配件用于标准欧式槽顶悬窗
窗户的框与扇的组角连接必须牢固可靠
把手，锁点多款供选择，也可按要求配置
为达到最佳效果，滑撑尺寸需按窗重量来
选配
图中所示配置仅供参考，具体可根据型材
及窗规格来搭配
舌头有多款，长度可选择

The system is applicable for standard European
Awning Window.
Optional handle & locking points, can be Customized;
Optional tongue with various length;
Window frame and sash should be firm at the corner;
To achieve the optimum results, hinge should be accorded
to window's weight.
Attached Configuration only for reference.

序号 NO.	类型 ITEMS	编号 PART ID	数量 QTY	备注 REMARK
1	滑撑 Friction Stay	22 槽下悬滑撑 22 underslot suspension brace	2	多款供选择 Multiple options
2	把手 Handle	BS-D21-AA	1	多款供选择 Multiple options
3	传动杆 drive link	CDG-A04	1	多款供选择 Multiple options
4	锁扣 Locking Kit	SK-A01	2	多款供选择 Multiple options
5	限位撑 Limiter Stay	KTXWC-X"	2	

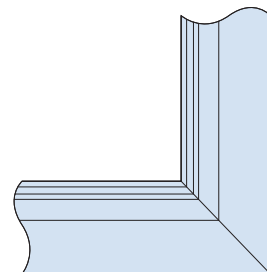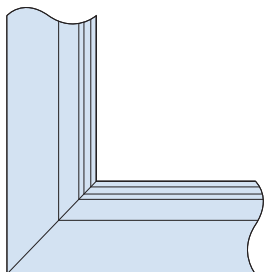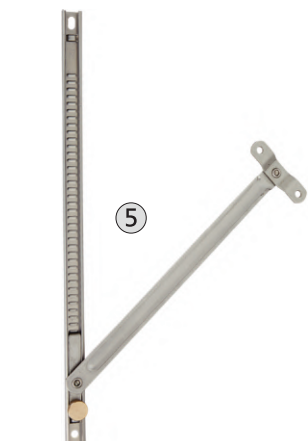

下悬窗XXC-03

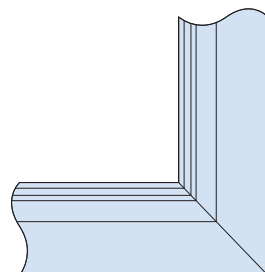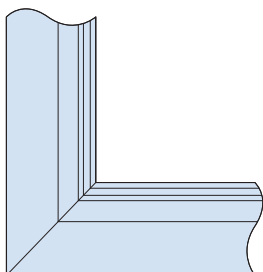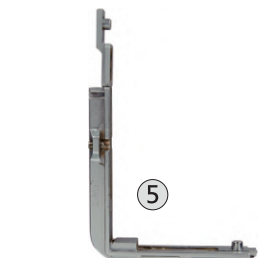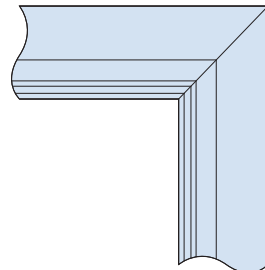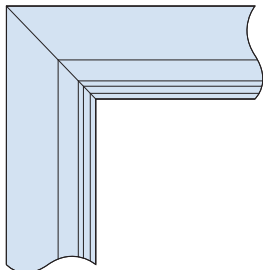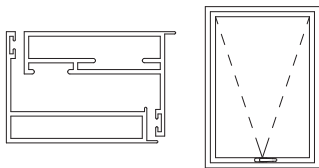

该系列配件用于标准欧式槽顶悬窗
窗户的框与扇的组角连接必须牢固可靠
把手, 锁点多款供选择, 也可按要求配置
为达到最佳效果, 滑撑尺寸需按窗重量来
选配
图中所示配置仅供参考, 具体可根据型材
及窗规格来搭配
舌头有多款, 长度可选择

The system is applicable for standard European
Awning Window.
Optional handle & locking points, can be Customized;
Optional tongue with various length;
Window frame and sash should be firm at the corner;
To achieve the optimum results, hinge should be accorded
to window's weight.
Attached Configuration only for reference.

序号 NO.	类型 ITEMS	编号 PART ID	数量 QTY	备注 REMARK
1	滑撑 Friction Stay	22 槽下悬滑撑 22 underslot suspension brace	2	多款供选择 Multiple options
2	锁扣 Locking Kit	SK-A01	4	多款供选择 Multiple options
3	锁点 Locking Point	SD-A01	2	
4	把手 Handle	BS-D21-AA	1	多款供选择 Multiple options
5	转角器 Corner Device	ZJQ-A02	2	多款供选择 Multiple options
6	锁点 Locking Point	SD-A02	2	
7	连接块 Connecting Block	LJK-A02	1	多款供选择 Multiple options

